

Her bliver en e34 omlakeret med farven sepang bronze metallic og får en mindre optimering med banan manifold og K&N filter. Kabinen fra en nyere E60 med elektriske funktioner bliver tilpasset i bilen.




























































































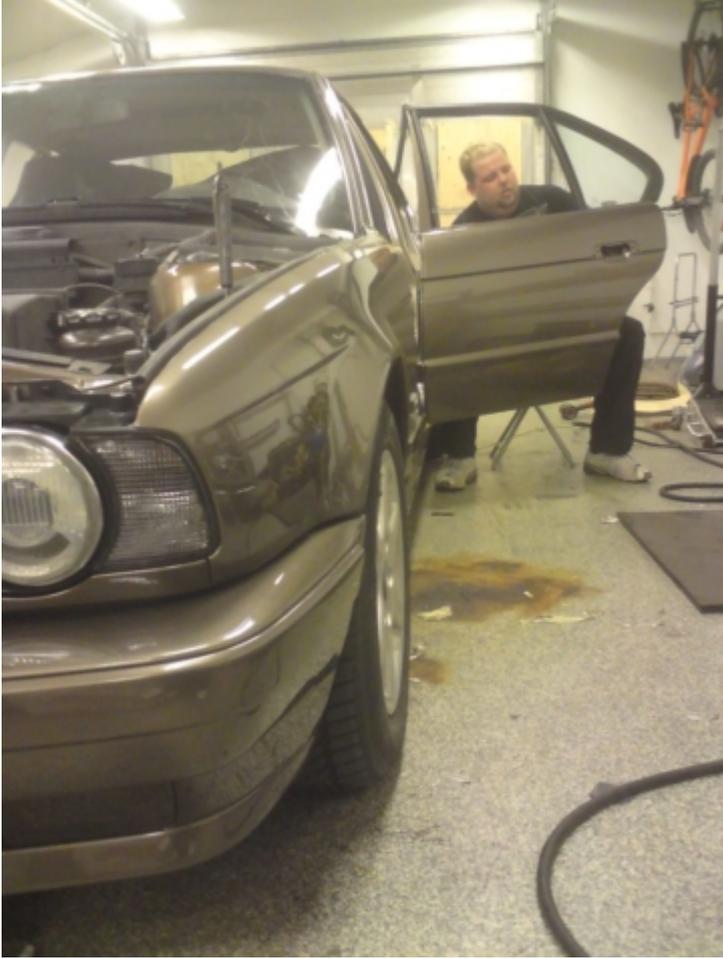


































































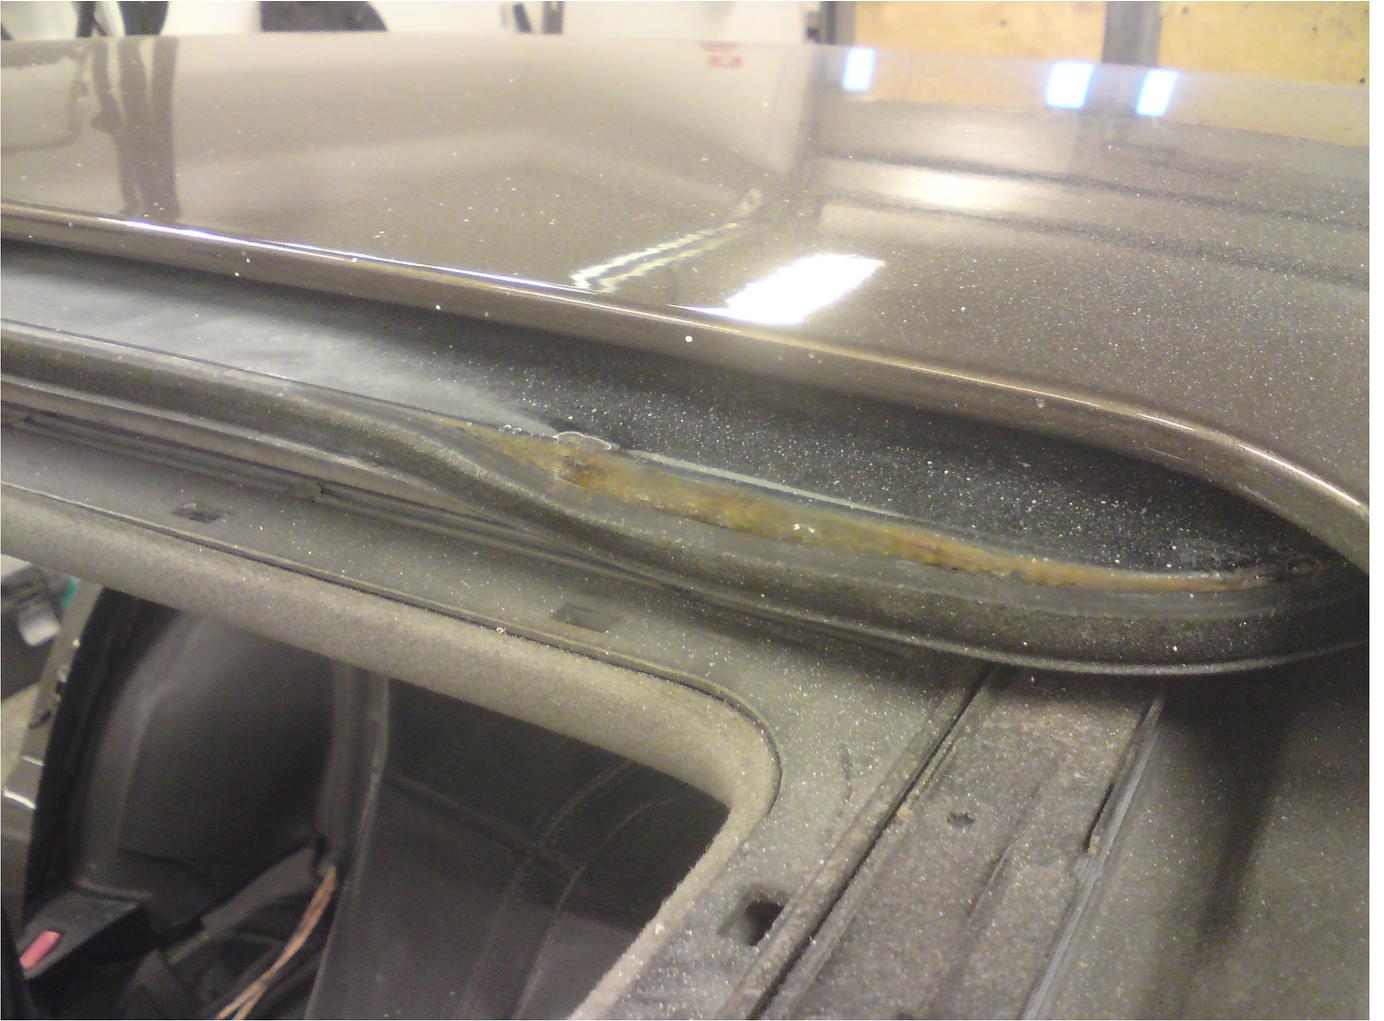





















Technical label with specifications and safety information, including a table with columns for 'Parameter' and 'Value'.

Parameter	Value
Rated Voltage	12 V
Rated Capacity	45 Ah
Rated Power	540 W
Rated Current	4.5 A
Rated Discharge Current	4.5 A
Rated Discharge Power	540 W
Rated Discharge Capacity	45 Ah
Rated Discharge Current (10 min)	4.5 A
Rated Discharge Power (10 min)	540 W
Rated Discharge Capacity (10 min)	45 Ah
Rated Discharge Current (30 min)	4.5 A
Rated Discharge Power (30 min)	540 W
Rated Discharge Capacity (30 min)	45 Ah
Rated Discharge Current (1 h)	4.5 A
Rated Discharge Power (1 h)	540 W
Rated Discharge Capacity (1 h)	45 Ah
Rated Discharge Current (3 h)	4.5 A
Rated Discharge Power (3 h)	540 W
Rated Discharge Capacity (3 h)	45 Ah
Rated Discharge Current (10 h)	4.5 A
Rated Discharge Power (10 h)	540 W
Rated Discharge Capacity (10 h)	45 Ah
Rated Discharge Current (20 h)	4.5 A
Rated Discharge Power (20 h)	540 W
Rated Discharge Capacity (20 h)	45 Ah
Rated Discharge Current (50 h)	4.5 A
Rated Discharge Power (50 h)	540 W
Rated Discharge Capacity (50 h)	45 Ah
Rated Discharge Current (100 h)	4.5 A
Rated Discharge Power (100 h)	540 W
Rated Discharge Capacity (100 h)	45 Ah











































